

SprintIR^{6S}

Ultra-fast response Carbon Dioxide Sensor

The **SprintIR^{6S}** is a high speed CO₂ sensor (20Hz) that can take up to 20 readings per second, with a warm-up time of under 30 seconds. The sensor has been designed with a sample volume of only 2ml, enabling it to achieve a 6 times faster response rate than the current SprintIR*.

With measurement ranges of 0-5%, 0-20% and 0-100%, the **SprintIR^{6S}** is suitable for applications where capture of rapidly changing CO₂ concentrations is required.

At less than a cubic inch in size, the **SprintIR^{6S}** operates at between 3.25 and 5.5V, with a power consumption of only 35mW. The sensor is available with options to support either flow-through or diffusion configuration, depending on the application.

- Ultra-fast response rate - 6X faster than the SprintIR*
- Faster warm-up time - < 30 secs to first reading
- High speed sensing - 20 readings per second (20Hz)
- Low power - 35mW

** Based on 0.1 litres per minute flow rate and 0-10% step change in CO₂ concentration.*



SprintIR^{6S} CO₂ Sensor

Specifications


General Performance	
Warm-up Time	< 30 seconds
Operating Conditions	0°C to 50°C (Standard) 0 to 95% RH, non-condensing
Recommended Storage	-30°C to +70°C
CO ₂ Measurement	
Sensing Method	Non-dispersive infrared (NDIR) absorption Patented Gold-plated optics Solid-state source and detector
Sample Method	Flow through
Measurement Range	0-5%, 0-20%, 0-100%
Accuracy	±70 ppm +/- 5% of reading ¹ (100% Range ±300 ppm +/-5% of reading ¹)
Non Linearity	< 1% of FS
Pressure Dependence	0.13% of reading per mm Hg in normal atmospheric conditions.
Operating Pressure Range	Atmospheric pressure range. Lower and higher pressures require more advanced pressure compensation.
Response Time	Flow Rate Dependent – see graph below. Response time also depends on user configurable digital filter settings.

Electrical/ Mechanical


Power Input 3.25 to 5.5V. (3.3V recommended).
Peak Current 33mA⁴.
Average Current <12mA⁴.

Power Consumption 35 mW⁴

Dimensions and Wiring Connections

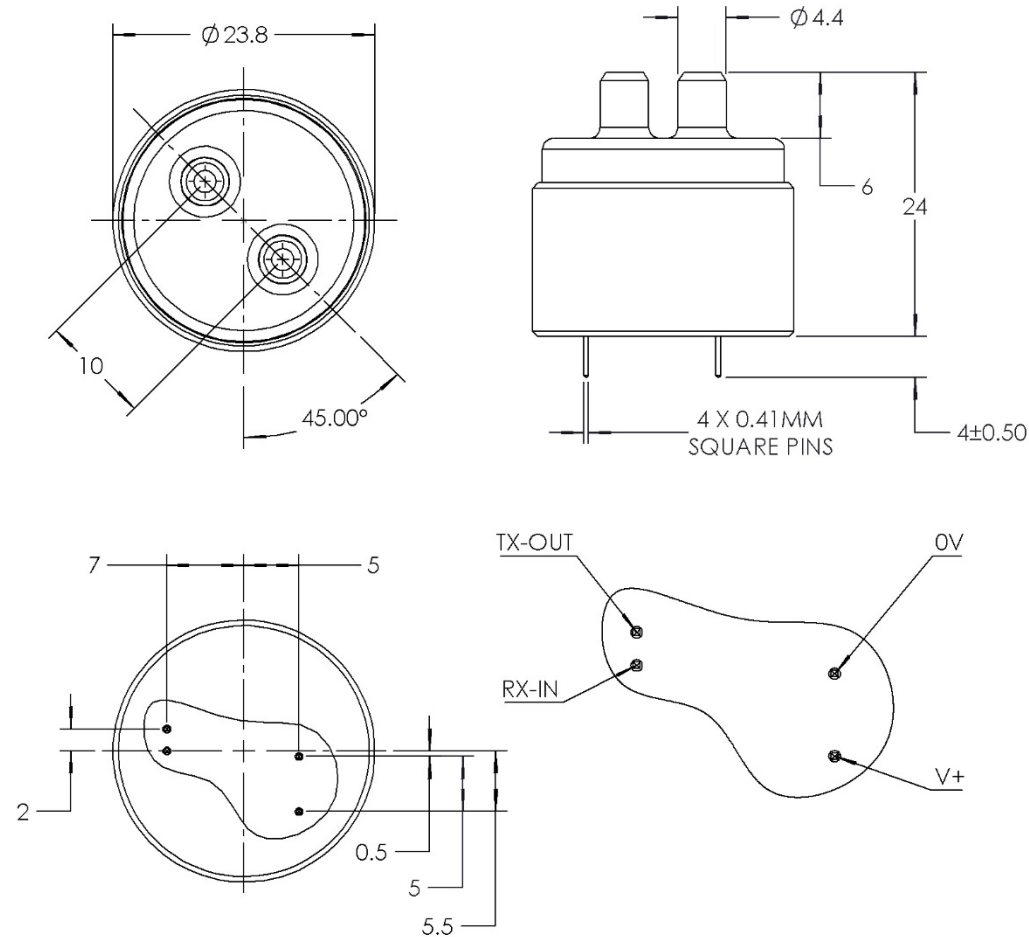

Pin	Comments
0V	GND
V+	3V3 to 5V
RX-IN	Sensor Rx. 5V tolerant
TX-OUT	Sensor Tx. V _{oh} = 3V

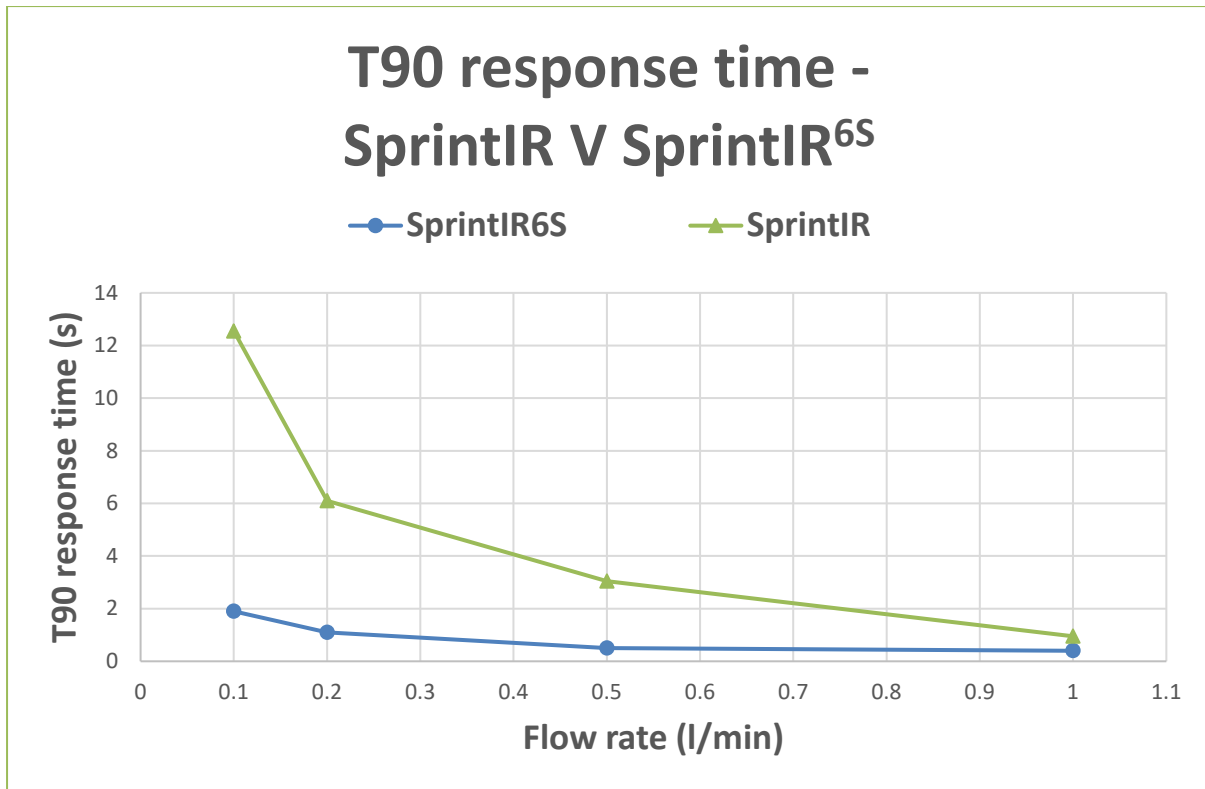

T90 time measured from 0 to 10% CO₂. Digital filter switched off.

Note 1: All measurements are at STP unless otherwise stated.

Note 2: External Pressure calibration required.

Note 3: User Configurable Filter Response.

Note 4: Power measurements for standard CO₂ sensor with 20 readings per second.

This documentation is provided on an as-is basis and no warranty as to its suitability or accuracy for any particular purpose is either made or implied. Gas Sensing Solutions Ltd will not accept any claim for damages howsoever arising as a result of use or failure of this information. Your statutory rights are not affected. This information is not intended for use in any medical appliance, device or system in which the failure of the product might reasonably be expected to result in personal injury. This document provides preliminary information that may be subject to change without notice.